

LIQUIFOIL⁺

BY GRATCH INTERNATIONAL

Benefits:

- Limited damage during construction and transportation
- Reduces damage and failure costs
- Fast curing
- Easy to peel off
- No (adhesive) residue
- Protects against viewing (dry: semi-transparent)
- Consumption 4 - 10 m² per litre
- Resistant against rain (water)
- Very efficient in use, no waste
- Water-based, pH-neutral, non-toxic, non-flammable and no chemical waste

Liquid foil for temporary protection

LiquiFoil is the easy way to protect various non absorbing surfaces during construction, transport or storage. It is easy to apply with a roller or by airless spraying on glass and other non-absorbing surfaces such as powder-coated aluminium, stainless steel, plating etc. LiquiFoil protects the surface against scratches, contamination, paint, welding and grinding splatter, concrete and other damages.

After use LiquiFoil is easy to peel off. The result is a surface without damage, which saves failure and repair costs.

Simple, easy and durable

LiquiFoil is a water-based product, non-toxic or flammable and not classified as chemical waste. It can easily be applied with a roller or by airless spraying. Once the LiquiFoil has been applied, it remains on the surface as long as necessary (for the entire duration of a project). Because it's a liquid, there is no material loss that should be cut away as in conventional films. LiquiFoil is easy peelable and leaves no residue behind, because there is no glue in it.

The required protection can be determined by adjusting the layer thickness of the LiquiFoil, the thicker the layer, the better the protection.

*Easy to apply with
a paint roller or
airless spray!*



SIMPLE, EASY AND DURABLE

Easy to use

1. Applying


LiquiFoil can be applied with a paint roller or airless spray. Apply a proper layer of the product. Check the layer thickness with a comb. The drying time depends on the temperature, from 30 - 120 mins, and can be shortened by using an air blower. The dry LiquiFoil is semi-transparent, daylight can come in, however the viewing is limited.

2. Protect

Once applied LiquiFoil protects the glass and other non-absorbing surfaces against dirt, paint, scratches, welding splatter, cement and other damages during construction or renovation projects, transport or storage.

3. Peel away

When protection is no longer required, LiquiFoil can be easily removed by peeling it off. It leaves a clean and intact surface. Further cleaning is not necessary.

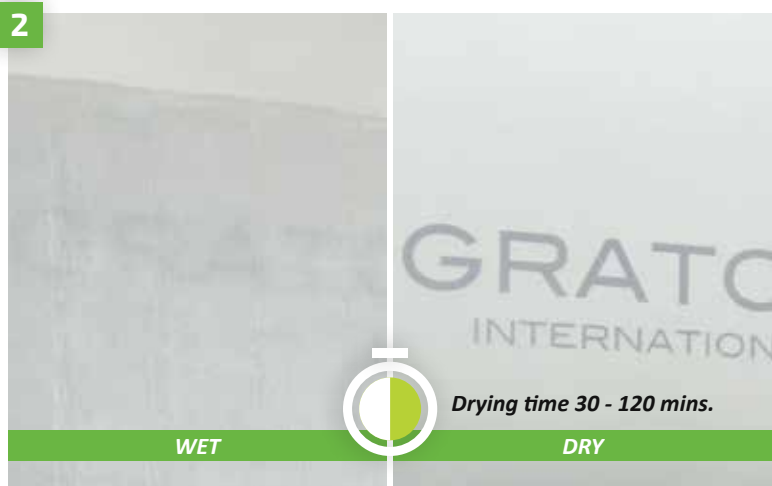

LIQUIFOIL⁺
BY GRATCH INTERNATIONAL

*LiquiFoil Plus is applicable on glass
and many other non-absorbing
surfaces.*

GRATCH INTERNATIONAL

P.O. Box 7034 • 5980 AA Panningen • The Netherlands
T. +31 77 465 10 95 • E. info@gratch.com