



LIQUIFOIL

PEEL OFF SURFACE PROTECTION

- Protects against damages during construction & transportation
- Reduces damage & failure costs
- Fast-curing
- Easy to peel off, UV-stable
- No (adhesive) residue
- Protects against viewing (semi-transparent)
- Consumption 4-10 m² per liter
- Resistant against rain (water)
- Very efficient in use, no waste
- Water-based, pH-neutral, non-toxic, non-flammable, no chemical waste

Easy to apply with roller or airless spray!

Liquid foil for temporary protection

LiquiFoil is the easy way to protect various non-absorbing surfaces during construction, transport or storage. It is easy to apply with a roller or by airless-spraying on glass and other non-absorbing surfaces, such as powdercoated aluminium, stainless steel, plating etc. LiquiFoil protects the surface against scratches, contamination, paint, welding and grinding splatter, concrete and other damages. After use LiquiFoil is easy to peel off. The result is a surface without damage, which saves failure and repair costs.

Simple, safe and durable

LiquiFoil is a waterbased dispersion, non-toxic or flammable and not classified as chemical waste. Once the LiquiFoil has been applied, it remains on the surface as long as necessary (for the entire duration of a project). Because it's a liquid, there is no material loss that should be cut away as in conventional films. LiquiFoil is UV-stable and therefore easy peelable and leaves no residue behind, because there is no glue component in it. The required protection can be determined by adjusting the layerthickness of the LiquiFoil, the thicker the layer, the better the protection.





Step 1. Apply

LiquiFoil can be applied with a paint roller or airless spray. Apply a proper layer of the product. Check the layer thickness with a measuring tool. The curing time depends on the temperature and thickness, from 15 minutes upto 24 hours and can be accelerated by using an air blower. Cured LiquiFoil is semi-transparent, daylight can come in, however the viewing is limited.


Step 2. Protect

Once applied, LiquiFoil protects the glass and other non-absorbing surfaces against dirt, paint, scratches, welding and grinding splatter, cement residue and other damages during construction, renovation, storage or transportation.

Step 3. Peel off

When protection is no longer required, LiquiFoil can easily be removed by peeling it off. It leaves a clean and intact surface. Further cleaning is not necessary.

LiquiFoil is applicable on glass and other non-absorbing surfaces and available in various types.

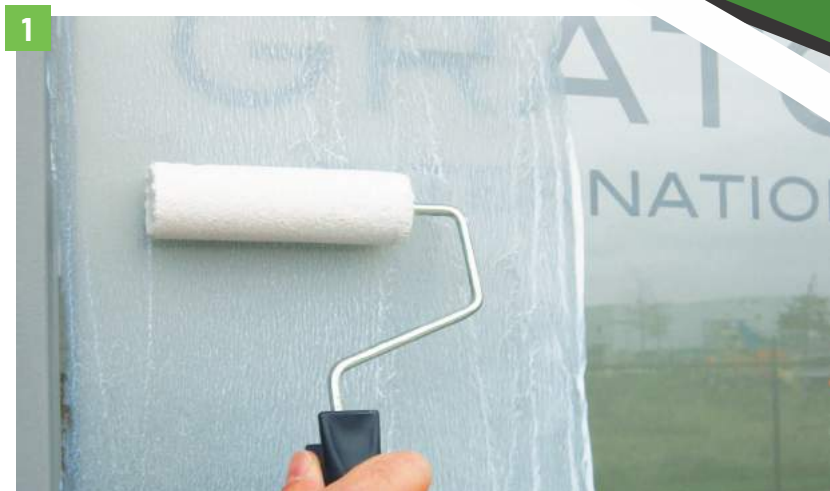

GRATCH INTERNATIONAL

JF Kennedylaan 248 • 5981 WX Panningen • The Netherlands
Tel: +31 77 465 10 95 • E-mail: info@gratch.com